



SUNRICHER



5 YEAR  
WARRANTY

# 300W DALI-2 DT7 Controlled Relay Switch

Features of the:  
SR-2701S-DT7



DALI/ DALI 2/  
DT7 Compatible



On / Off  
Control



Capacitive  
Load: 300W



Resistive Load:  
1000W



Inductive Load:  
1000W


CE    IP20

# Specification

Model		SR-2701S-DT7		
Output	Switching AC voltage	250V		
	Switching DC voltage	30V		
	Rated current	Resistive Load: 4.3A	Capacitive Load: 1.3A	Inductive Load: 4.3A
	Rated power	Resistive Load: 1000W	Capacitive Load: 300W	Inductive Load: 1000W
	Type of Contact	1 normally closed		
Input	AC Voltage	100-240VAC		
	DALI Control input	1		
	DALI consumption	<3mA		
Environment	Working TEMP.	-20 - +50°C		
	Waterproof Grade	IP20		
Others	Net. weight	0.22kg		
	Size	45*45.5*20.3mm (L*W*D)		
Notes	1. Single DALI address per device. 2. DALI address can be assigned by the DALI Master. 3. Do not install with power applied to device. 4. Do not expose the device to moisture. 5. For Built in applications.			


## Mechanical Specification

- DALI input: terminal 2 pole terminal block: Positive (DA+), Negative (DA-)
- Output Relay: 2 pole terminal block
- 0/1-10V output: 2 pole terminal block: Positive (+), Negative (-)
- Suggested wire diameter: Input/ Output: 0.5-2.5mm

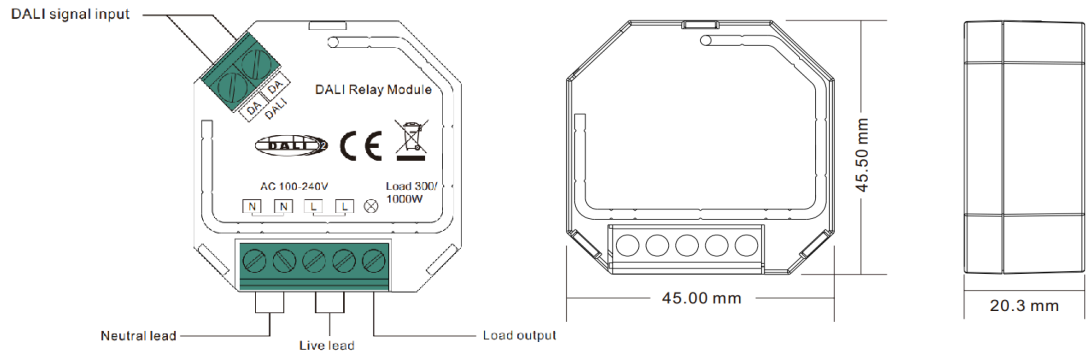

## Wiring Diagram

### 1. Switching of 100-240VAC load

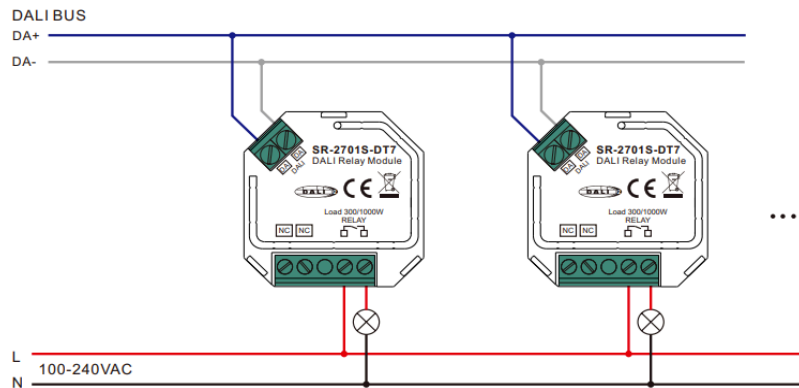

### 2. Switching of 12/24VDC load

