








# POWER SOURCE



**5 YEAR  
WARRANTY**

**60W**  
**0/1-10V**  
**Dimmable**  
**Constant**  
**Current**  
**LED Driver**  
**With Selectable**  
**Output**

## Features of the: ADC-60

-  0-1/10V Dimmable
-  Output Current Selectable By DIP switch
-  AC Input Range: 100-277VAC with PFC
-  IP20 Design For Indoor Installation
-  Class II Power Supply
-  Easy Installation
-  Protections: Short Circuit, Overload, Over Temperature





CE    IP20 SELV

Model		ADC-60							
Output	Rated Current (mA)	600mA	700mA	800mA	900mA	1000mA	1100mA	1200mA	1300mA
	T ON ↓ OFF	⬇⬇⬇⬇	⬇⬇⬇⬇	⬇⬇⬇⬇	⬇⬇⬇⬇	⬇⬇⬇⬇	⬇⬇⬇⬇	⬇⬇⬇⬇	⬇⬇⬇⬇
	DC Voltage	3-65V	3-65V	3-65V	3-65V	3-60V	3-55V	3-50V	
	Rated Power	39W	45.5W	52W	58.5W	60W	60W	60W	60W
	Current Tolerance	±5mA							
	Rated Current (mA)	1400mA	1500mA	1600mA	1700mA	1800mA	1900mA	2000mA	2100mA
	T ON ↓ OFF	⬇⬇⬇⬇	⬇⬇⬇⬇	⬇⬇⬇⬇	⬇⬇⬇⬇	⬇⬇⬇⬇	⬇⬇⬇⬇	⬇⬇⬇⬇	⬇⬇⬇⬇
	DC Voltage	3-43V	3-40V	3-38V	3-35V	3-33V	3-32V	3-30V	3-29V
	Rated Power	60W	60W	60W	60W	60W	60W	60W	60W
Input	Rated Input Voltage	100-277VAC							
	Rated Frequency	47-63HZ							
	Power Factor	0.99@120VAC	0.95@230VAC	0.90@277VAC					
	Efficiency (Typ.)	83.3%@120VAC	84.5%@230VAC	83.7%@277VAC					
	AC Current (Max.)	0.8A							
	Inrush Current (Typ.)	10.8A,104uS@50% Ipeak @120V			24A,108uS @50% Ipeak @277V				
	Leakage Current	<0.50mA							
Protection	Short Circuit	Constant current mode, recovers automatically after fault condition is removed.							
	Output No-Load Voltage	75V max.							
	Over Temperature	Ambient temp. over 55±10°C, output will be off; recovers automatically after temperature drops							
	Protection Class	II							
Environment	Working TEMP.	-40+60°C							
	Working Humidity	20-90%RH, non condensing							
	Storage Temp. Humidity	-40 - +80°C, 10-95%RH							
	TEMP. coefficient	±0.03%/°C (0-50°C)							
	Vibration	10-500Hz, 2G 10min./1 cycle,period for 60min.each along X,Y,Z axes							
Safety	Safety Standards	EN61347-1 EN61347-2-13							
	Withstand Voltage	I/P-O/P:3.75KVAC							
	Isolation Resistance	I/P-O/P:100MΩ/500VDC/25°C/70%RH							
Others	Weight	0.17kg							
	Size	192.50*62*24mm (L*W*H)							
	Packing	320*280*215mm (50PCS/CTN) for outer carton							
Notes	1. All parameters NOT specially mentioned are measured at 277VAC input, rated load and 25°C of ambient temperature. 2. Tolerance: includes set up tolerance, line regulation and load regulation. 3. Specifications are subject to change without prior notice. Contact your supplier to confirm any critical parameters.								

## Mechanical Specification


- Input 3 pole terminal block: Active AC (L), Neutral AC (N).
- Output 2 pole terminal block: Positive (LED+), Negative (LED-).
- 0/1-10V. Terminals 2P.
- Suggested wire diameter: Input 0.75-2mm<sup>2</sup>; Output: 0.5-2mm<sup>2</sup>.
- Ensure that all wiring is correct before testing in order to avoid damage to the LED driver or the LEDs.

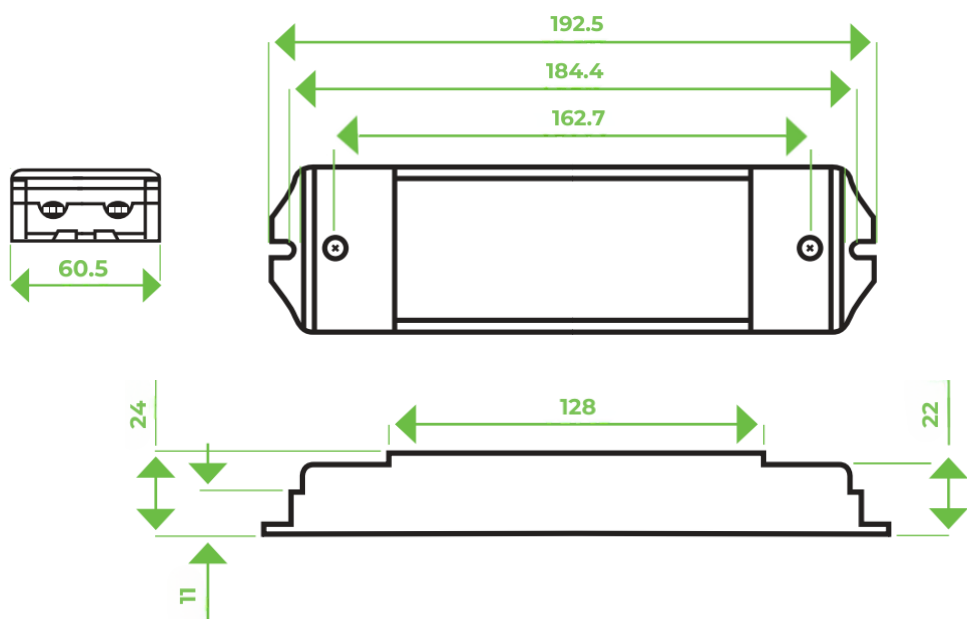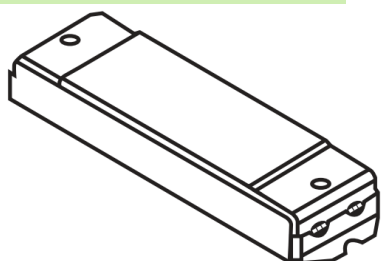


## Dimming Operation and Connecting Diagram

1. Adjust the LED driver output to the desired constant current by using the dip switch.
2. Connect the 0/1-10V dimmer pot – for example the Power Source D1-10.
3. Connect a light fitting and test operation before connecting any further fittings.

### 0-10/1-10V

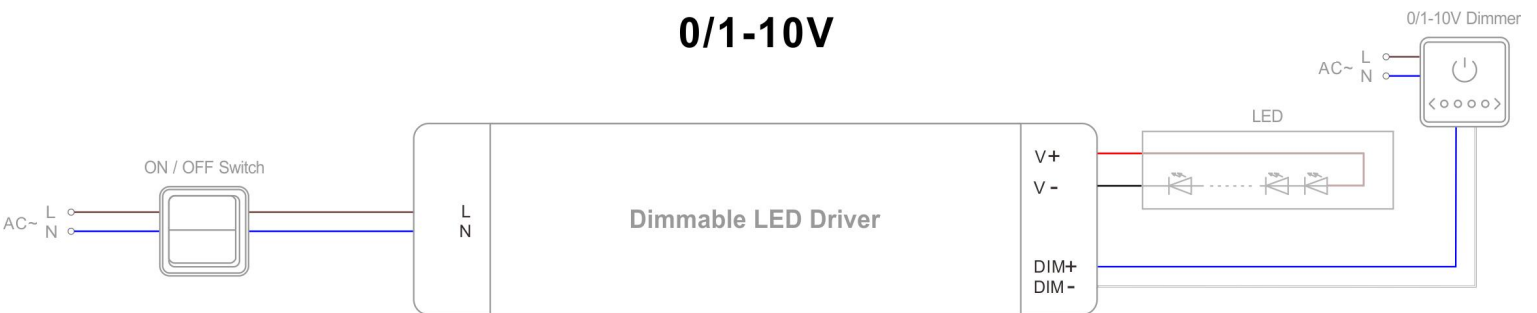

## De-rating Curve and Instructions

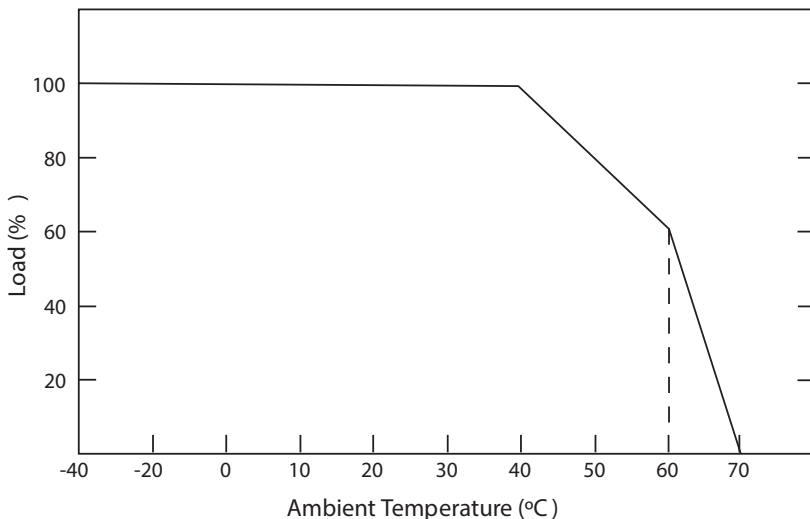

To extend their life, please refer to the De-rating Curve and de-rate according to the temperature.

- If being used in higher ambient temperatures, ensure the load on the LED driver is de-rated in accordance with this chart. Failure to do so could lead to a premature failure, which is not covered by the warranty.

## Instruction:

- 1) This driver should be installed by qualified and professional person;
- 2) Please make sure the driver is installed with adequate ventilation around it to allow for heat dissipation.
- 3) Ensure that wiring is correct before test in order to avoid LED and power supply damage.

Any other question please feel free to contact ADM Systems Pty Ltd.