







Features

- · Constant Voltage + Constant Current mode output
- Metal housing with class I design
- Standby power consumption <0.5W at remote off
- IP67 / IP65 rating for indoor or outdoor installations
- Function options: output adjustable via potentiometer;
 3 in 1 dimming (dim-to-off)
- Typical lifetime > 62000 hours
- 7 years warranty

Applications

- · LED high-bay lighting
- Parking space lighting
- LED fishing lamp
- LED greenhouse lighting
- Type "HL" for use in Class I, Division 2 hazardous (Classified) location.


■ GTIN CODE

MW Search: https://www.meanwell.com/serviceGTIN.aspx

Description

HLG-600H series is a 600W AC/DC LED driver featuring the dual mode constant voltage and constant current output. HLG-600H operates from $90 \sim 305 \text{VAC}$ and offers models with different rated voltage ranging between 12V and 54V. Thanks to the high efficiency up to 96%, with the fanless design, the entire series is able to operate for $-40\,^{\circ}\text{C} \sim +90\,^{\circ}\text{C}$ case temperature under free air convection. The design of metal housing and IP67/IP65 ingress protection level allows this series to fit both indoor and outdoor applications. HLG-600H is equipped with various function options, such as dimming methodologies, so as to provide the optimal design flexibility for LED lighting system.

■ Model Encoding




Туре	IP Level	Function	Note
Α	IP65	Io and Vo adjustable through built-in potentiometer	In Stock
В	IP67	3 in 1 dimming function (0~10VDC, 10V PWM signal and resistance)	In Stock
AB	IP65	Io and Vo adjustable through built-in potentiometer & 3 in 1 dimming function (0~10VDC,10V PWM signal and resistance)	In Stock
Blank	IP67	Io and Vo fixed	In Stock

SPECIFICATION

MODEL			HLG-600H-12	HLG-600H-15	HLG-600H-20	HLG-600H-24	HLG-600H-30	HLG-600H-36	HLG-600H-42	HLG-600H-48	HLG-600H-54	
	DC VOLTAGE		12V	15V	20V	24V	30V	36V	42V	48V	54V	
ОИТРИТ	CONSTANT CURRENT	REGION Note.4		7.5 ~ 15V	10 ~ 20V	12 ~ 24V	15 ~ 30V	18 ~ 36V	21 ~ 42V	24 ~ 48V	27 ~ 54V	
	RATED CURRENT		40A	36A	28A	25A	20A	16.7A	14.3A	12.5A	11.2A	
	RATED POWER		480W	540W	560W	600W	600W	601.2W	600.6W	600W	604.8W	
	RIPPLE & NOISE (max.) Note.2	150mVp-p	150mVp-p	150mVp-p	150mVp-p	200mVp-p	250mVp-p	250mVp-p	250mVp-p	350mVp-p	
	VOLTAGE ADJ. RANGE CURRENT ADJ. RANGE VOLTAGE TOLERANCE Note.3				via built-in po							
			10.2 ~ 12.6V 12.7 ~ 15.8V 17 ~ 21V 20.4 ~ 25.2V 25.5 ~ 31.5V 30.6 ~ 37.8V 35.7 ~ 44.1V 40.8 ~ 50.4V 45.9 ~ 56.7									
			Adjustable fo	r A-Type only	via built-in po			1		1		
			20 ~ 40A	18 ~ 36A	14 ~ 28A	12.5 ~ 25A	10 ~ 20A	8.3 ~ 16.7A	7.1 ~ 14.3A	6.2 ~ 12.5A	5.6 ~ 11.2	
				±2.0%	±1.5%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	
	LINE REGULATION		±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	
	LOAD REGULATION		±2.0%	±1.5%	±1.0%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	
	SETUP, RISE TIME						1 - 0.070	- 0.070		_ = 0.070	1 - 0.070	
	HOLD UP TIME (Typ.)		5 500ms, 80ms/ 115VAC, 230VAC									
	VOLTAGE RANGE Note.5 FREQUENCY RANGE		15ms / 115VAC, 230VAC									
			90 ~ 305VAC 127 ~ 431VDC (Please refer to "STATIC CHARACTERISTIC" section)									
			(Please refer to "STATIC CHARACTERISTIC" section)									
	I REGUENCI KAN	IOL		5\/ΔC PE>n c	95/230VAC, PF	>0 03/277\/\	C @ full load					
	POWER FACTOR (Typ.)						•					
			,		CTOR (PF) CH		,					
	TOTAL HARMONIC I	DISTORTION	, ,	_	(115VAC, 230) ARMONIC DIS		75%/277VAC)	1				
INPUT		2201/40	'			1	· · ·	05 50/	069/	069/	069/	
	EFFICIENCY	230VAC	92%	93.5%	94.5%	95%	95%	95.5%	96%	96%	96%	
	(Typ.)	277VAC	92.5%	93.5%	94.5%	95%	95%	95.5%	96%	96%	96%	
	AC CURRENT (Ty	. ,	7A / 115VAC	3.3A / 23		A / 277VAC	1 000 /4 0 D A	IENA 440				
		INRUSH CURRENT(Typ.)		COLD START 70A(twidth=1000µs measured at 50% Ipeak) at 230VAC; Per NEMA 410								
	MAX. No. of PSUs on 16A CIRCUIT BREAKER		1 unit (circuit breaker of type B) / 2 units (circuit breaker of type C) at 230VAC									
	LEAKAGE CURRENT		<0.75mA / 277VAC									
	STANDBY POWER CO	ONSUMPTION	<0.5W at rem	ote off								
	OVED CURRENT No. 4		95 ~ 108%									
	OVER CURRENT	Note.4	Constant current limiting, recovers automatically after fault condition is removed									
	SHORT CIRCUIT		Constant current limiting, recovers automatically after fault condition is removed									
PROTECTION			13 ~ 16V	16.5 ~ 20.5V		26 ~ 30V		39.5 ~ 43.5V	46 ~ 50V	52.5 ~ 56.5V	59 ~ 63V	
	OVER VOLTAGE		Shut down o/	p voltage, re-p	ower on to reco	ver			'			
	OVER TEMPERATURE		Shut down o/p voltage, re-power on to recover Shut down o/p voltage, re-power on to recover									
	REMOTE ON/OFF CONTROL		Power on : "High" > 2 ~ 5V or Open circuit Power off : "Low" < 0 ~ 0.5V or Short circuit									
FUNCTION	5V STANDBY		5Vss: 5V@0.5A; tolerance ±5%, ripple: 100mVp-p(max.)									
			Tcase= -40 ~ +90°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)									
	WORKING TEMP. MAX. CASE TEMP.		Tcase=+90°C									
	WORKING HUMID		20 ~ 95% RH non-condensing									
NVIRONMENT			-40 ~ +85°C, 10 ~ 95% RH non-condensing									
	STORAGE TEMP., HUMIDITY TEMP. COEFFICIENT		±0.03%/°C (0 ~ 55°C)									
		.141		,	alo norted for	70min 00=h -1	ong V V 7	•				
	VIBRATION		10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes								ndont	
	SAFETY STANDARDS Note.7		UL60950-1, UL8750(type"HL"), CSA C22.2 No. 250.13-12, ENEC BS EN/EN61347-1, BS EN/EN61347-2-13 independent,									
SAFETY &			AS/NZS 60950.1(by CB)(AB type except),KC61347-1, KC61347-2-13(except for AB type) approved I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:1.5KVAC									
EMC (Note 10)	WITHSTAND VOLT											
	ISOLATION RESIS	TANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH									
	EMC EMISSION	Note.7	7 Compliance to BS EN/EN55015, BS EN/EN61000-3-2 Class C (@ load ≧ 50%) ; BS EN/EN61000-3-3, EAC TP TC GB/T 17743,GB17625.1, KS C 9815, KS C 9547						B, EAC TP TC 0	20;		
	EMC IMMUNITY		Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11, BS EN/EN61547, BS EN/EN55024, light industry level (surge immunity									
			Line-Earth 4KV, Line-Line 2KV), EAC TP TC 020; KS C 9815, KS C 9547									
	MTBF		913.4K hrs m	in. Telcordia	a SR-332 (Bello	core) ; 76.9K h	rs min. MIL-	HDBK-217F (2	5°C)			
THERS	DIMENSION		280*144*48.5	5mm (L*W*H)								
OTHERS				5mm (L*W*H) 16.6Kg/0.9CUF	T							


- 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.
- 3. Tolerance: includes set up tolerance, line regulation and load regulation.
- 4. Please refer to "DRIVING METHODS OF LED MODULE".
- 5. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.
- 6. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time.
- 7. The model certified for CCC(GB19510.14, GB19510.1, GB17743 and GB17625.1) is an optional model . Please contact MEAN WELL for details.
- 8. This series meets the typical life expectancy of >62,000 hours of operation when Tcase, particularly (to point (or TMP, per DLC), is about 75°C or less.
- 9. Please refer to the warranty statement on MEAN WELL's website at http://www.meanwell.com
- 10. The driver is considered a component which will be installed into a final equipment. All the EMC tests are been executed by mounting the unit on a 360mm*360mm metal plate with 1mm of thickness. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on https://www.meanwell.com//Upload/PDF/EMI_statement_en.pdf)
- 11. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).
- 12. For any application note and IP water proof function installation caution, please refer our user manual before using. https://www.meanwell.com/Upload/PDF/LED_EN.pdf
- ** Product Liability Disclaimer: For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx File Name:HLG-600H-SPEC 2024-07-19



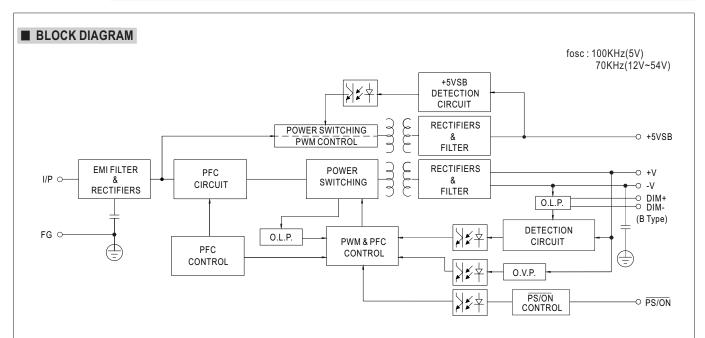

■ DRIVING METHODS OF LED MODULE

X This series is able to work in either Constant Current mode (a direct drive way) or Constant Voltage mode (usually through additional DC/DC driver) to drive the LEDs.




Typical output current normalized by rated current (%)

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.


Should there be any compatibility issues, please contact MEAN WELL.



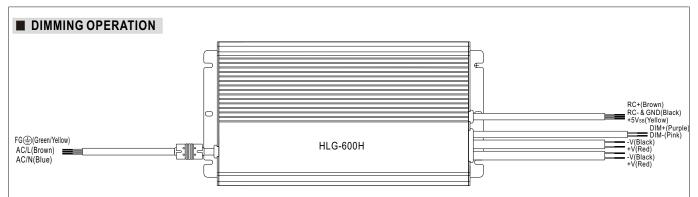


※ 3 in 1 dimming function (for B/AB-Type)

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM: 0 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: $100\mu A$ (typ.)
- O Applying additive 0 ~ 10VDC




"DO NOT connect "DIM- to -V"

O Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):





"DO NOT connect "DIM- to -V"


Applying additive resistance:



"DO NOT connect "DIM- to -V"







Note: 1. Min. dimming level is about 6% and the output current is not defined when 0% < Iout < 6%.

2. The output current could drop down to 0% when dimming input is about $0 \, \text{k} \, \Omega$ or $0 \, \text{Vdc}$, or $10 \, \text{V}$ PWM signal with $0 \, \text{\%}$ duty cycle.



70%

LOAD


50%

60%

80%

90%

100%

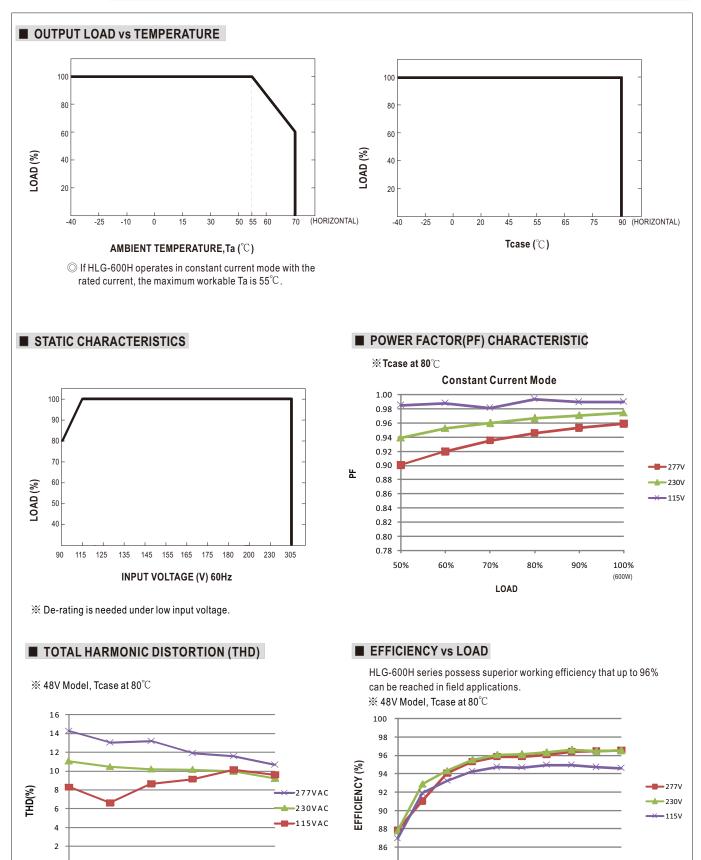

80% 90% 100%

20% 30% 40% 50% 60% 70%

LOAD



■ LIFETIME

